


RETRACTORS



Use your instrument with minimum effort
When released, the load will return to its rest position



Stainless steel rope

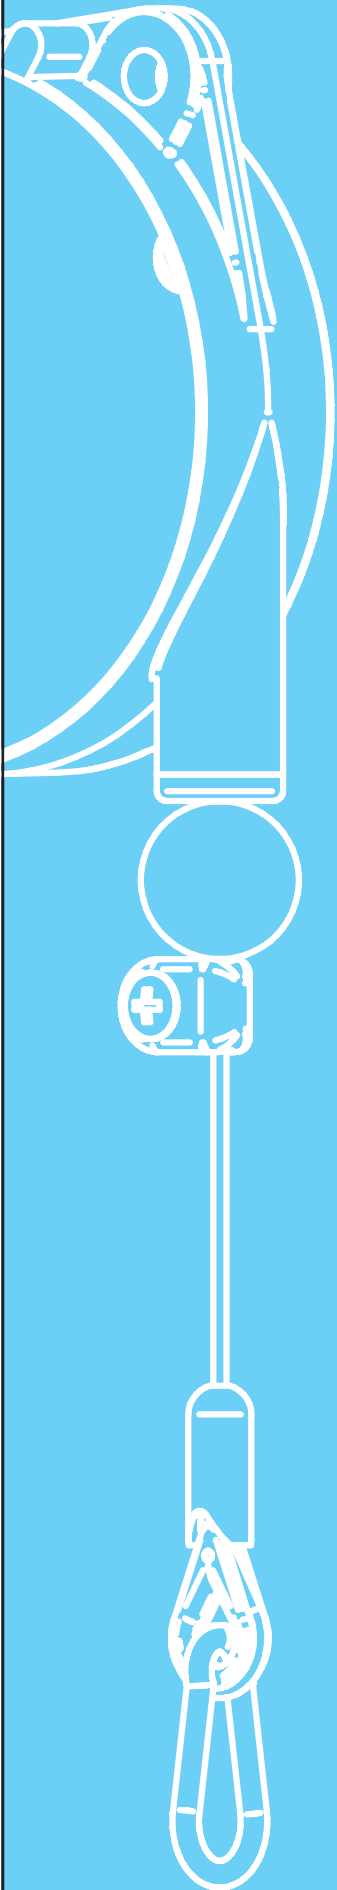


01



HSM 21023

	Nylon
	1600 mm
	Stainless Steel
	0,2÷3 kg

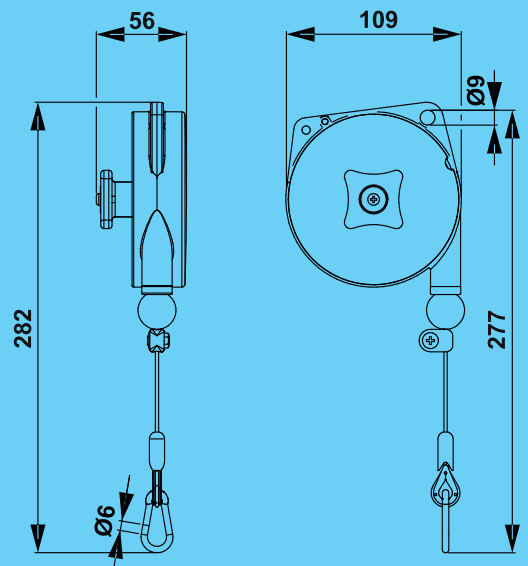

Item	9300	9301	9302	9303
	0,2÷0,5	0,4÷1	1÷2	2÷3
	0,43	0,46	0,49	0,64

9310÷9313

02



HSM 21023

dguv.de/dguv-test

	Aluminium
	1600 mm
	Stainless Steel
	0,2÷3 kg



03



HSM 21023

dguv.de/dguv-test

	Aluminium
	2000 mm
	Stainless Steel
	1÷8 kg

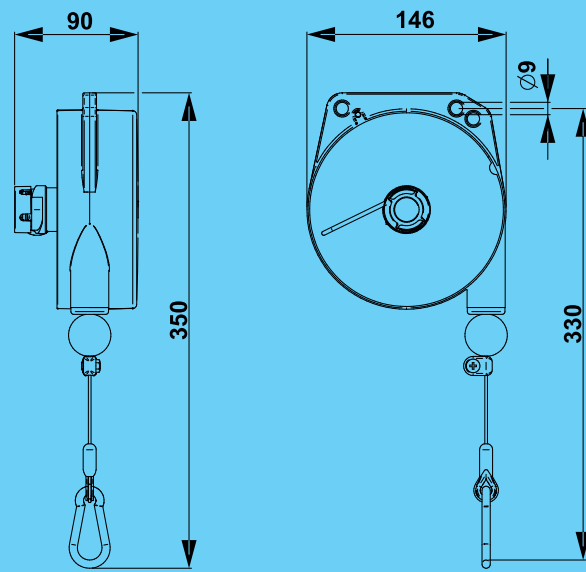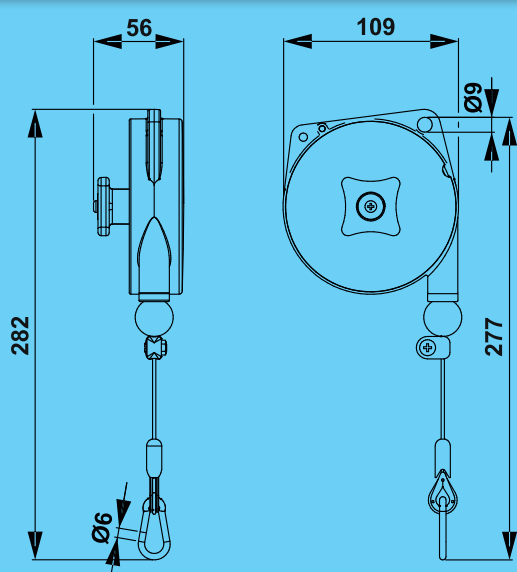

Item	9310	9311	9312	9313
	0,2÷0,5	0,4÷1	1÷2	2÷3
	0,55	0,57	0,60	0,74

Item	9320	9321	9322	9323
	1÷2,5	2÷4	4÷6	6÷8
	1,67	1,90	1,98	2,28

9336L÷9340

04




HSM 21023

	Aluminium
	2500 mm
	Stainless Steel
	0,5÷14 kg



Opz. 32952

Flexible cables holder (Max. load capacity 25kg)

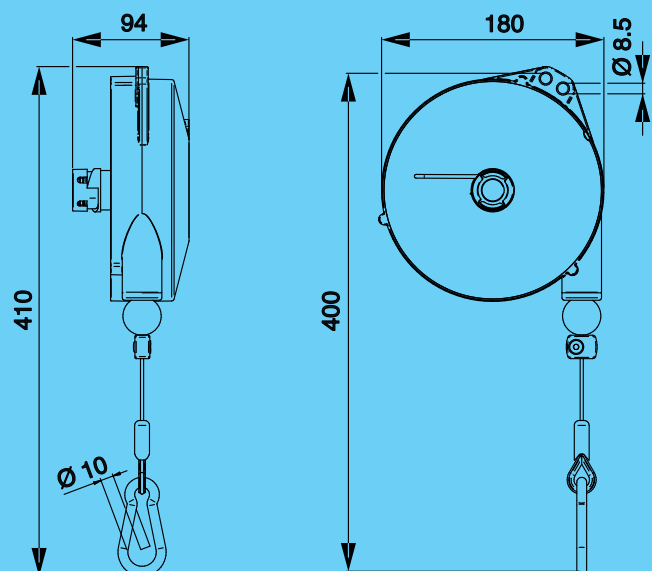

Item	9336L	9336	9337	9338	9339	9340
	0,5÷2	2÷4	4÷6	6÷8	8÷10	10÷14
	3,14	3,14	3,30	3,36	3,43	3,58

9346L÷9350

05


STOP



HSM 21023

	Aluminium
	2500 mm
	Stainless Steel
	0,5÷14 kg

These balancers are equipped with a device enabling to stop the stroke by carrying out a simple operation on the load and with a device that disables it.

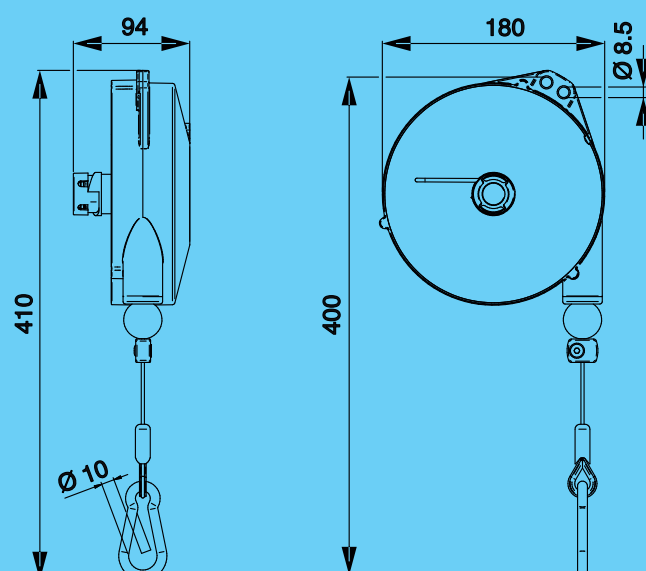

Item	9346L	9346	9347	9348	9349	9350
	0,5÷2	2÷4	4÷6	6÷8	8÷10	10÷14
	3,14	3,14	3,32	3,38	3,48	3,62