


ZERO GRAVITY BALANCERS



Use your instrument without feeling its weight
The load maintains the position where you leave it

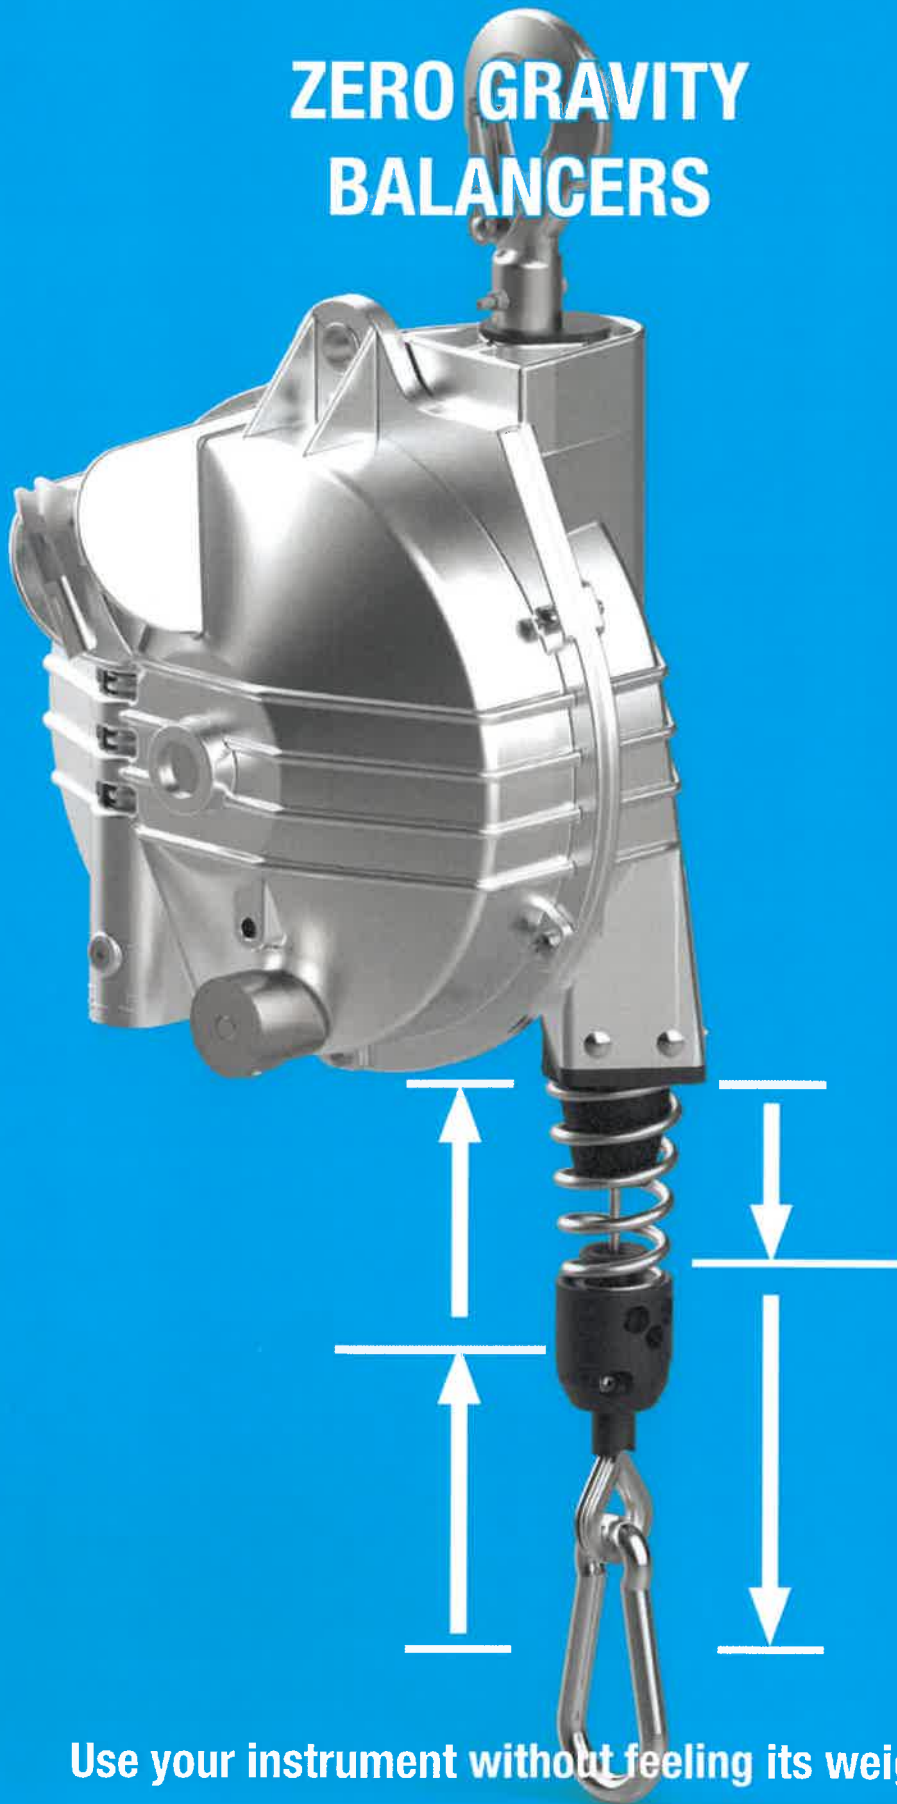

9354÷9359

9354G÷9359G

***Option F**



	Aluminium
	2000 mm
	Stainless Steel
	4÷25 kg

Option RI (70477)

Rotary and insulating device.

***Option F**

The balancer is equipped with a friction/brake which controls the rotation speed of the drum.

* This option is feasible when placing a new order while it is not possible to assemble this device on balancers already installed.



***Option F**



	Aluminium/Rubber
	2000 mm
	Stainless Steel
	4÷25 kg



Option RI (70477)

Rotary and insulating device.

***Option F**

The balancer is equipped with a friction/brake which controls the rotation speed of the drum.

* This option is feasible when placing a new order while it is not possible to assemble this device on balancers already installed.

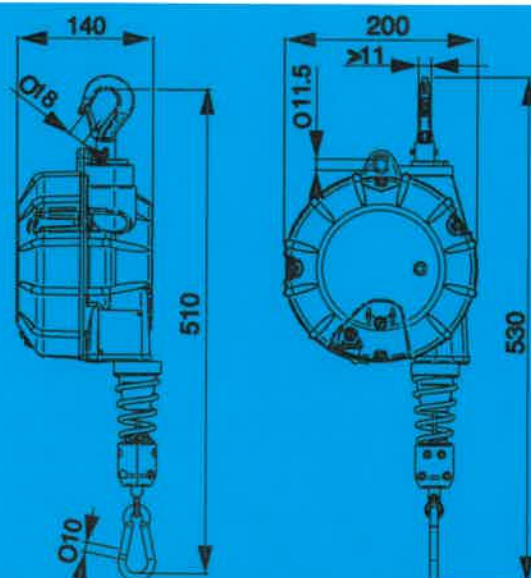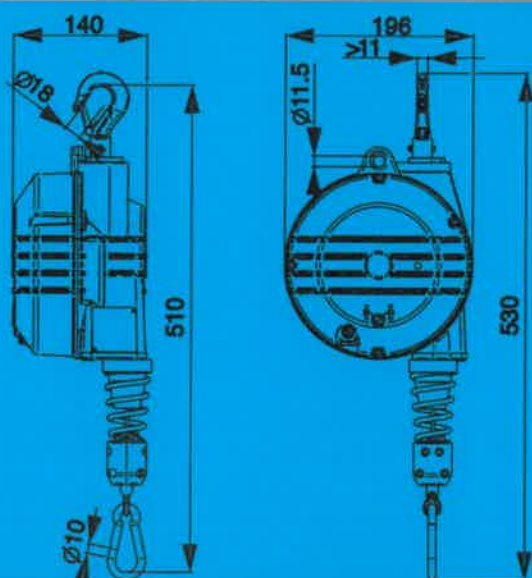

Item	9354	9355	9356	9357	9358	9359
	4÷7	7÷10	10÷14	14÷18	18÷22	22÷25
	4,94	5,30	5,67	6,26	5,89	6,53

Item	9354G	9355G	9356G	9357G	9358G	9359G
	4÷7	7÷10	10÷14	14÷18	18÷22	22÷25
	5,58	5,93	6,31	6,90	6,53	7,17

22




	Aluminium	
	2100 mm	9502÷9509
	2700 mm	9520÷9525
	Stainless Steel	
	12÷100 kg	

***Option F**

The balancer is equipped with a friction/brake which controls the rotation speed of the drum.


* This option is feasible when placing a new order while it is not possible to assemble this device on balancers already installed.

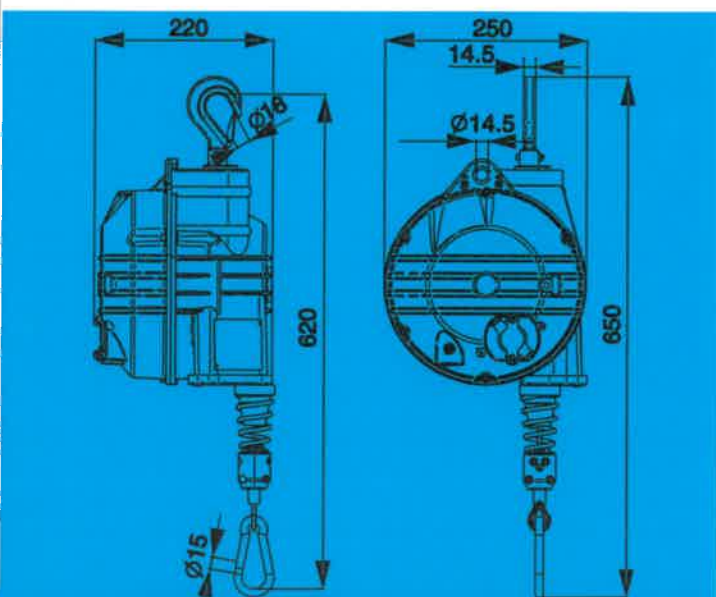***Option F****Option B**
(7190000007)**Option RI (70477)**

Rotary and insulating device.

Option B (7190000007)

Locking-unlocking device with control from the floor.

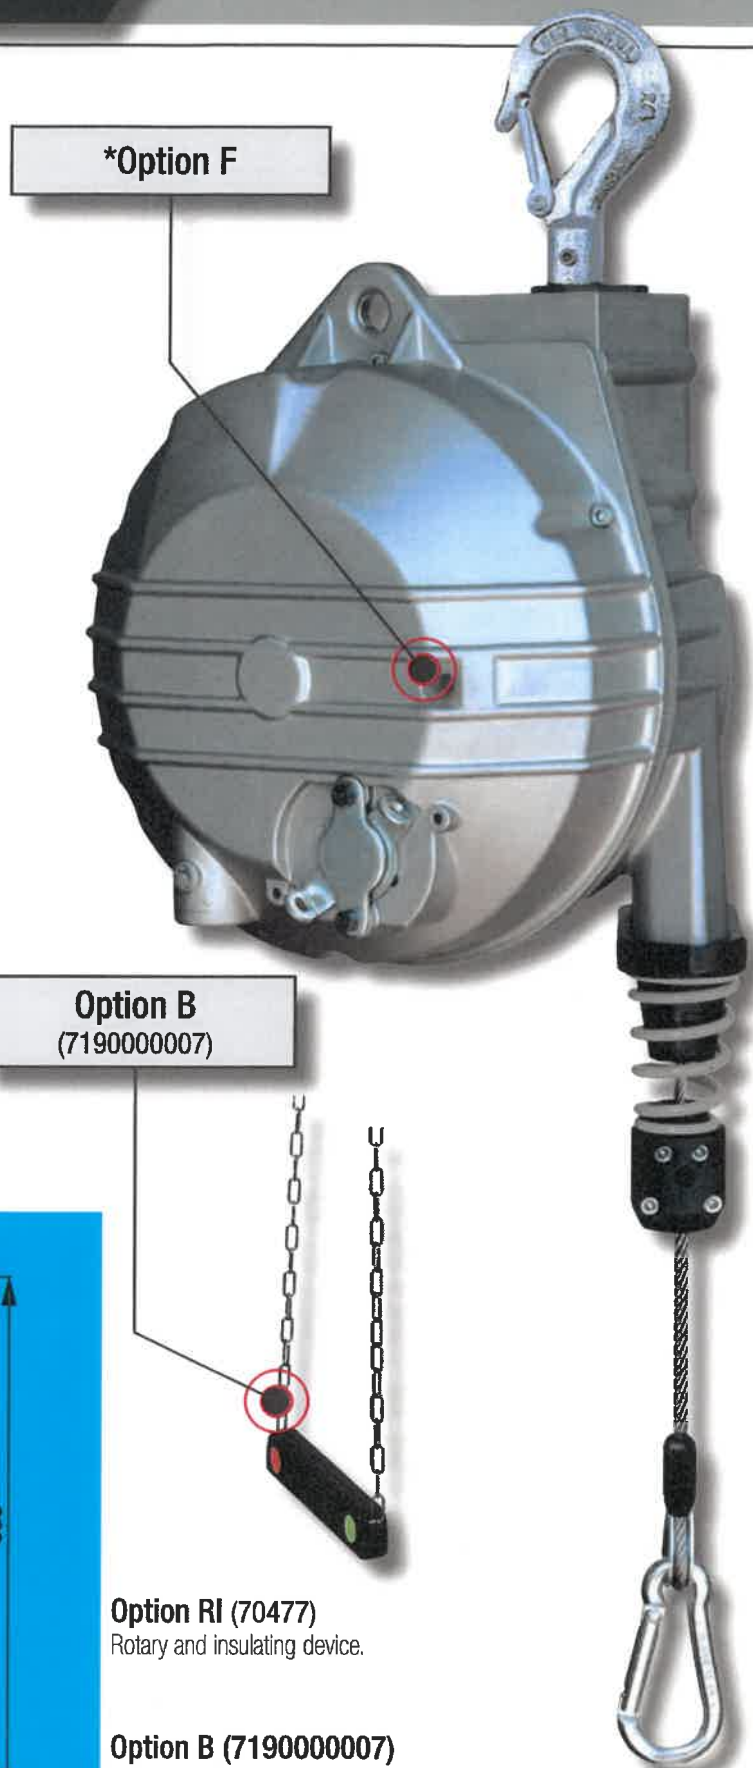

Item	9502	9503	9504	9505	9506	9507	9508	9509	9520	9521	9522	9523	9524	9525
	20÷30	30÷40	40÷50	50÷60	60÷70	70÷80	80÷90	90÷100	12÷20	20÷30	30÷40	40÷50	50÷60	60÷70
kg	12,60	15,20	15,50	16,70	15,50	17,70	16,20	16,80	12,80	12,60	15,80	15,40	16,60	15,70

9361÷9369

23



	Aluminium
	2000 mm
	Stainless Steel
	10÷75 kg

Option RI (70477)

Rotary and insulating device.

***Option B**

Locking-unlocking device with control from the floor.

* This option is feasible when placing a new order.

24



	Aluminium
	2000 mm
	Stainless Steel
	75÷105 kg



Option RI (70477)

Rotary and insulating device.

***Option B**

Locking-unlocking device with control from the floor.

* This option is feasible when placing a new order.

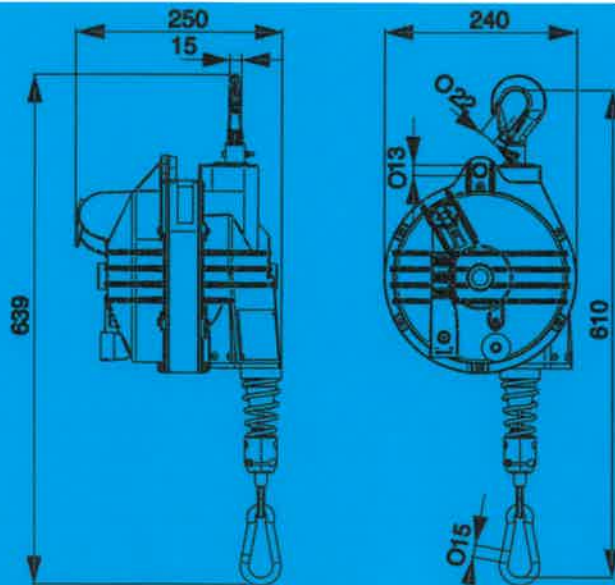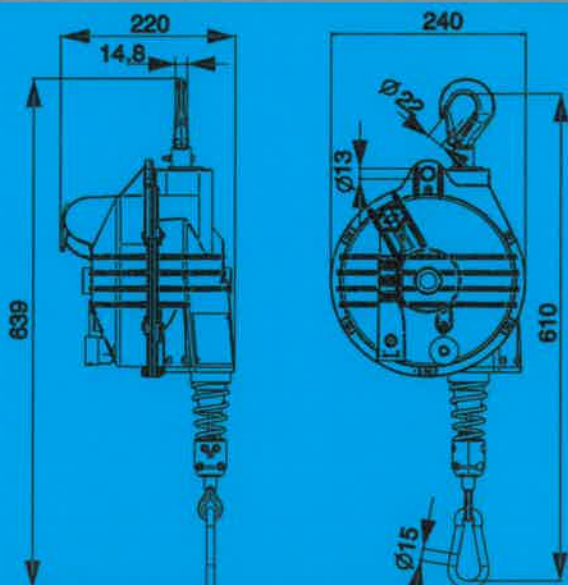

Item	9361	9362	9363	9364	9365	9366	9367	9368	9369
	10÷15	15÷20	20÷25	25÷30	30÷35	35÷45	45÷55	55÷65	65÷75
	9,20	9,50	9,80	10,20	10,60	11,00	11,30	12,30	13,20

9370	9371
75÷90	90÷105
16,10	17,20

9361G÷9369G

25



	Aluminium/Rubber
	2000 mm
	Stainless Steel
	10÷75 kg

Option RI (70477)

Rotary and insulating device.

***Option B**

Locking-unlocking device with control from the floor.

* This option is feasible when placing a new order.

9370G÷9371G

26



	Aluminium/Rubber
	2000 mm
	Stainless Steel
	75÷105 kg



Option RI (70477)

Rotary and insulating device.

***Option B**

Locking-unlocking device with control from the floor.

* This option is feasible when placing a new order.

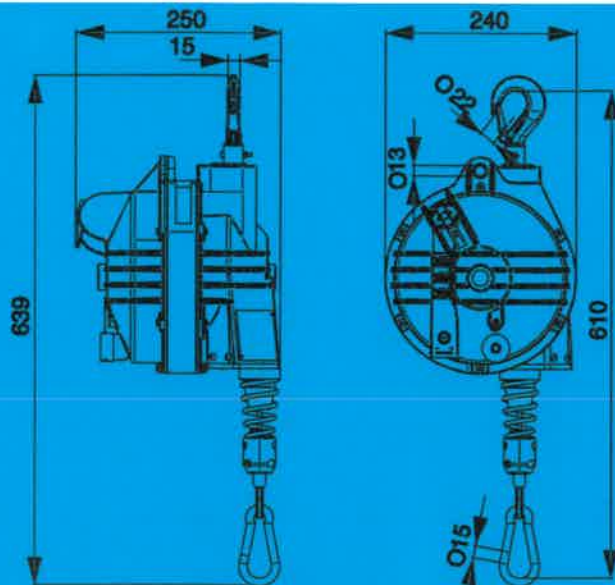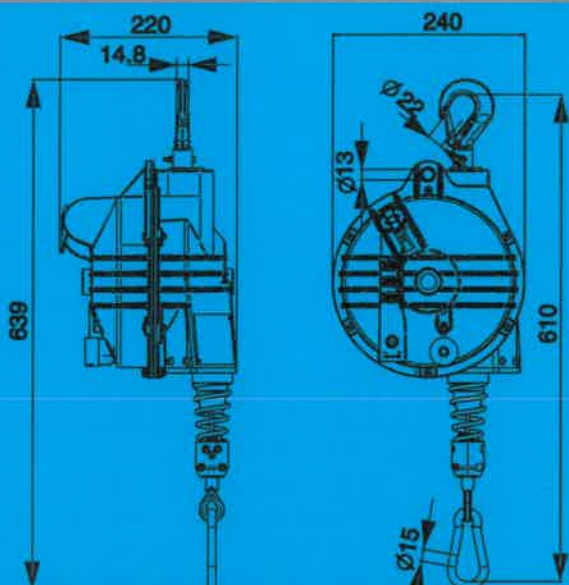

Item	9361G	9362G	9363G	9364G	9365G	9366G	9367G	9368G	9369G
	10÷15	15÷20	20÷25	25÷30	30÷35	35÷45	45÷55	55÷65	65÷75
	10,30	10,60	10,90	11,30	11,70	12,10	12,40	13,40	14,30

9370G	9371G
	75÷90
	17,20
	18,30



	Aluminium	
	2500 mm	9401÷9405
	3000 mm	9431÷9433
	Stainless Steel	
	15÷60 kg	

Option RI (70477)

Rotary and insulating device.

***Option B**


Locking-unlocking device with control from the floor.

*This option is feasible when placing a new order.

***Option B1**

Reinforced Locking-unlocking device with control from the floor.

*This option is feasible when placing a new order.

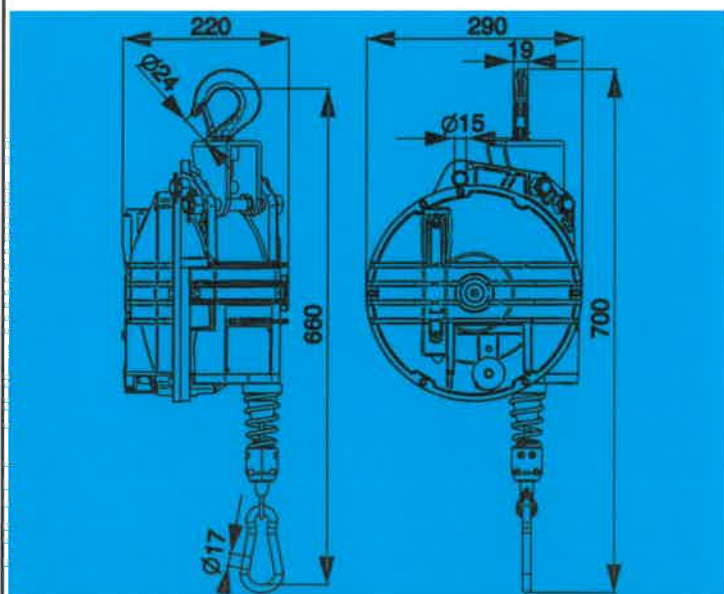***Option B****Option RI
(70477)*****Option B1**

Item	9401	9402	9403	9404	9405
	15÷20	20÷30	30÷40	40÷50	50÷60
	19,67	21,11	21,11	22,03	23,07

9431	9432	9433
15÷20	20÷25	25÷35
19,67	19,67	21,11



	Aluminium/Rubber	
	2500 mm	9401G÷9405G
	3000 mm	9431G÷9433G
	Stainless Steel	
	15÷60 kg	

Option RI (70477)

Rotary and insulating device.

***Option B**


Locking-unlocking device with control from the floor.

*This option is feasible when placing a new order.

***Option B1**

Reinforced Locking-unlocking device with control from the floor.

*This option is feasible when placing a new order.

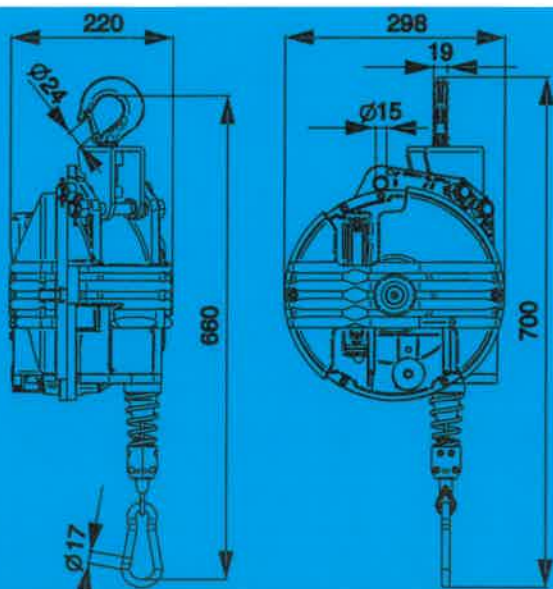

Item

9401G

9402G

9403G

9404G

9405G

9431G

9432G

9433G



15÷20

20÷30

30÷40

40÷50

50÷60

15÷20

20÷25

25÷35



20,75

22,19

22,19

23,12

24,15

20,75

20,75

22,19



	Aluminium	
	2500 mm	9411÷9414
	3000 mm	9434÷9444
	Stainless Steel	
	35÷100 kg	

Option RI (70477)

Rotary and insulating device.

***Option B**


Locking-unlocking device with control from the floor.

*This option is feasible when placing a new order.

***Option B1**

Reinforced Locking-unlocking device with control from the floor.

*This option is feasible when placing a new order.

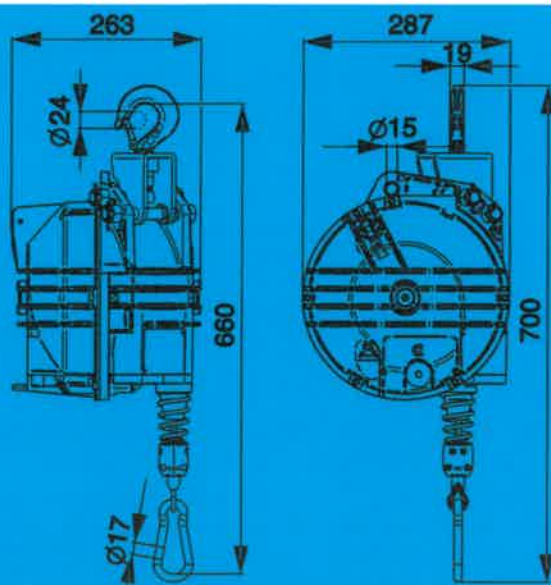

Item	9411	9412	9413	9414
	60÷70	70÷80	80÷90	90÷100
	25,56	26,75	27,90	28,46

9434	9435	9436	9441	9442	9443	9444
35÷45	40÷50	50÷60	60÷70	70÷80	80÷90	80÷100
24,46	23,64	24,69	25,56	26,75	27,90	28,46

30



	Aluminium/Rubber	
	2500 mm	9411G÷9414G
	3000 mm	9434G÷9444G
	Stainless Steel	
	35÷100 kg	

Option RI (70477)

Rotary and insulating device.

***Option B**


Locking-unlocking device with control from the floor.

*This option is feasible when placing a new order.

***Option B1**

Reinforced Locking-unlocking device with control from the floor.

*This option is feasible when placing a new order.

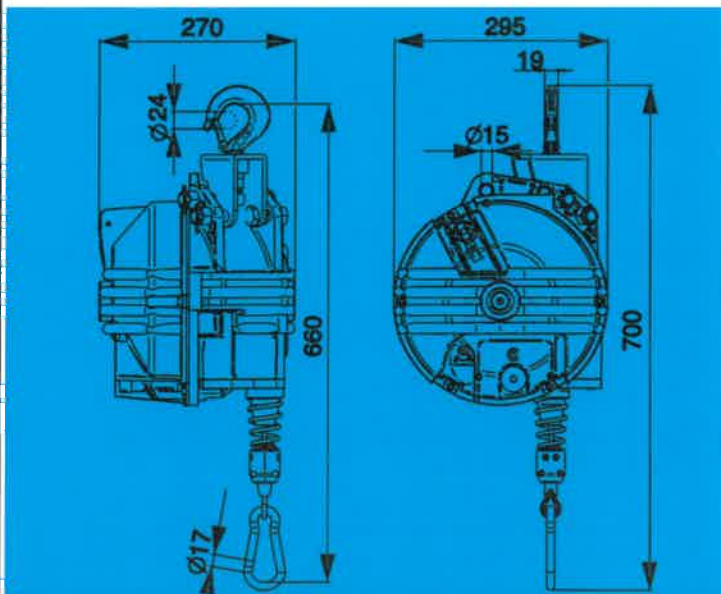

Item	9411G	9412G	9413G	9414G
	60÷70	70÷80	80÷90	90÷100
kg	26,79	27,98	29,13	29,69

9434G	9435G	9436G	9441G	9442G	9443G	9444G
35÷45	40÷50	50÷60	60÷70	70÷80	80÷90	80÷100
25,69	24,88	25,91	26,79	27,98	29,13	29,69

31



	Aluminium	
	2500 mm	9422÷9426
	3000 mm	9451÷9456
	Stainless Steel	
	100÷180 kg	

Option RI (70477)

Rotary and insulating device.

***Option B**


Locking-unlocking device with control from the floor.

*This option is feasible when placing a new order.

***Option B1**

Reinforced Locking-unlocking device with control from the floor.

*This option is feasible when placing a new order.

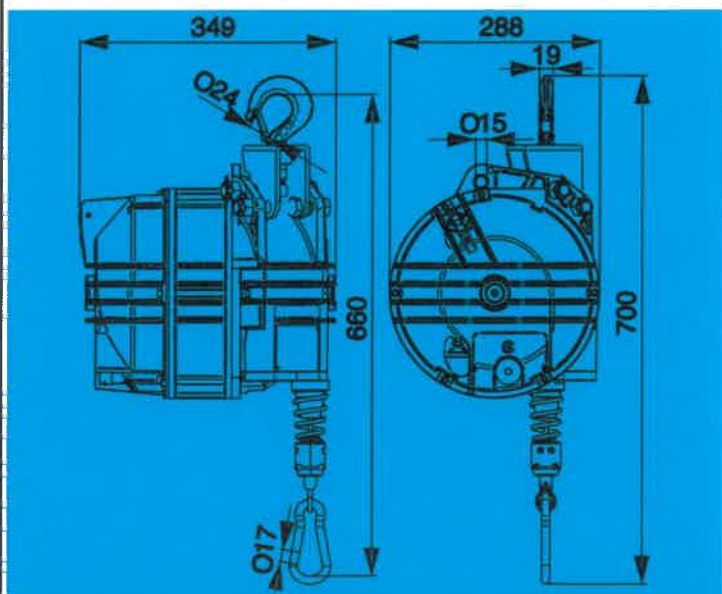

Item	9422	9423	9424	9425	9426
	100÷120	120÷140	130÷150	140÷160	160÷180
	36,61	38,51	38,83	40,90	43,20

9451	9452	9453	9454	9455	9456
100÷115	115÷130	130÷140	140÷150	150÷160	160÷180
36,61	36,77	38,51	38,83	40,90	43,20

9422G÷9426G

9451G÷9456G

32



	Aluminium/Rubber	
	2500 mm	9422G÷9426G
	3000 mm	9451G÷9456G
	Stainless Steel	
	100÷180 kg	

Option RI (70477)

Rotary and insulating device.

***Option B**


Locking-unlocking device with control from the floor.

*This option is feasible when placing a new order.

***Option B1**

Reinforced Locking-unlocking device with control from the floor.

*This option is feasible when placing a new order.

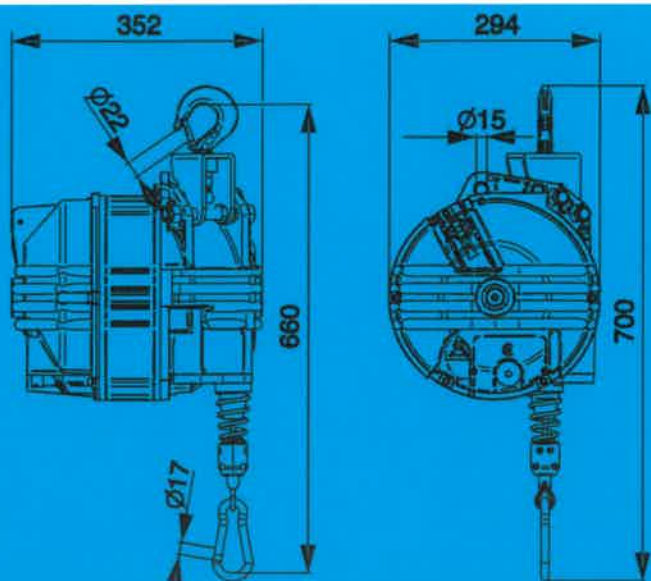

Item	9422G	9423G	9424G	9425G	9426G
	100÷120	120÷140	130÷150	140÷160	160÷180
	37,83	39,74	40,06	42,13	44,43

9451G	9452G	9453G	9454G	9455G	9456G
100÷115	115÷130	130÷140	140÷150	150÷160	160÷180
37,83	37,99	39,74	40,06	42,13	44,43