




Starpoint øyebolt VRS, den absolutte stjernen blant øyeboltene
Iht. maskindirektivet 2006/42/EG

4 Kan belastes i alle retninger!
GANGER SIKRERE

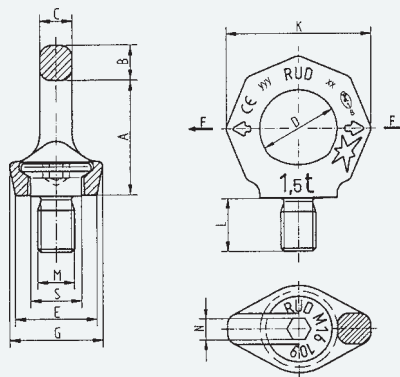

Art. nr.	Type	WLL tonn	Vekt kg pr. stk.	Mål i mm										
				A	B	C	D	E	G	K	L	M	N	S
12140600	VRS-M6	0,1	0,06	27	9	7	20	23	27	37	9	6	6	13
12140800	VRS-M8	0,3	0,1	34	11	8,5	25	25	28	47	12	8	6	16
12141000	VRS-M10	0,4	0,1	34	11	8,5	25	25	28	47	15	10	6	16
12141200	VRS-M12	0,75	0,2	42	13	10	30	30	34	56	18	12	8	20
12141400	VRS-M14	0,75	0,2	42	13	10	30	30	34	56	18	14	8	20
12141600	VRS-M16	1,5	0,3	49	15	14	35	35	40	65	24	16	10	23,5
12141800	VRS-M18	1,5	0,3	49	15	15	35	35	40	65	24	18	10	23,5
12142000	VRS-M20	2,3	0,5	57	17	16	40	40	50	75	30	20	12	29
12142200	VRS-M22	2,3	0,5	57	17	16	40	42	50	75	30	22	12	29
12142400	VRS-M24	3,2	0,9	70	21	19	48	50	60	90	36	24	14	35
12142700	VRS-M27	3,2	0,9	70	21	19	48	48	60	90	36	27	14	35
12143000	VRS-M30	4,5	1,7	86	26	24	60	60	75	112	45	30	17	44
12143300	VRS-M33	4,5	1,8	86	36	24	60	60	75	112	45	33	17	41,5
12143600	VRS-M36	7	2,9	103	32	29	72	75	90	135	54	36	22	53
12144200	VRS-M42	9	4,6	120	38	34	82	85	105	158	63	42	24	61,5
12144800	VRS-M48	12	7,0	137	43	38	94	100	120	180	72	48	27	70,5
12145600	VRS-1/4"-20UNC	0,1	0,06	27,5	9	7	20	23	27	37	9	1/4"	7/32"	13
12145800	VRS-5/16"-18UNC	0,3	0,119	34	11	8,5	25	25	28	47	12	5/16"	1/4"	14
12146000	VRS-3/8"-16UNC	0,4	0,1	34	11	8,5	25	25	28	47	15	3/8"	1/4"	15
12146100	VRS-7/16"-14UNC	0,4	0,119	34	11	8,5	25	25	28	47	15	7/16"	1/4"	15
12146200	VRS-1/2"-13UNC	0,75	0,2	42	13	10	30	30	34	56	18	1/2"	5/16"	18
12146600	VRS-5/8"-11UNC	1,5	0,3	49	15	14	35	35	40	65	24	5/8"	3/8"	22
12147000	VRS-3/4"-10UNC	2,3	0,5	57	17	16	40	40	50	75	30	3/4"	1/2"	27,5
12147200	VRS-7/8"-9UNC	2,3	0,6	57	17	16	40	40	50	75	32	7/8"	1/2"	27,5
12147400	VRS-1"-8UNC	3,2	0,9	69	21	19	48	48	60	90	36	1"	9/16"	33
12148000	VRS-1 1/4"-7UNC	4,5	1,7	86	26	24	60	60	75	112	45	1 1/4"	5/8"	41,5
12148600	VRS-1 1/2"-6UNC	7	2,9	103	32	29	72	75	90	135	54	1 1/2"	7/8"	49,5
12149200	VRS-1 3/4"-5UNC	9	4,6	120	38	34	82	85	105	158	63	1 3/4"	1"	58
12149800	VRS-2"-4,5UNC	12	7,0	137	43	38	94	100	120	180	72	2"	1 1/8"	66

Med forbehold om tekniske endringer.