




Green Pin Standard Sjakler

H-sjakkell med mutter og splint

- Materiale: Bue og bolt, Grade 60, varmebehandlet
- Sikkerhetsfaktor: Min. bruddlast = 6 x WLL
- Standard: EN 13889
Tilfredsstiller kravene fra US FED Spec. RR-C-271. Type IVA Klasse 3, Grade A
- Overflate: Varmgalvanisert
- Temperaturområde: -20°C inntil +200°C
- Sertifisering: Kan leveres med 3.1.B sertifikat

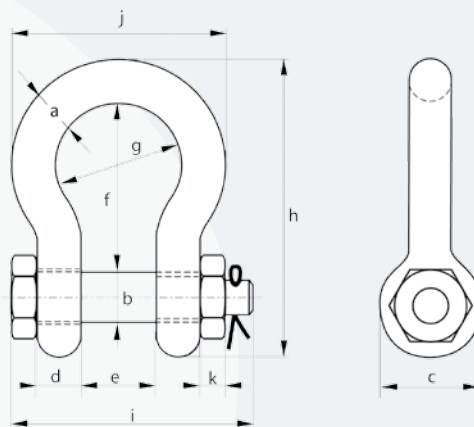

Type G-4163

Art. nr.	WLL tonn	Mål i mm											Vekt kg
		a	b	c	d	e	f	g	h	i	j	k	
11700705	0,5	7	6	17	7	12	29	20	54	43	37	4	0,06
11700907	0,75	9	8	21	9	13,5	32	22	61	51	42	5	0,11
11701010	1	10	10	23	10	17	36,5	26	71	61	49	8	0,16
11701115	1,5	11	11	26	11	19	43	29	80	68	54	11	0,22
11701320	2	13,5	13	34	13,5	22	51	32	91	83	63	13	0,42
11701632	3,25	16	16	40	16	27	64	43	114	99	79	17	0,74
11701947	4,75	19	19	47	19	31	76	51	136	115	94	20	1,18
11702265	6,5	22	22	53	22	36	83	58	157	131	107	23	1,77
11702585	8,5	25	25	60	25	43	95	68	176	151	124	25	2,58
11702895	9,5	28	28	67	28	47	108	75	197	167	137	28	3,66
11703212	12	32	32	74	32	51	115	83	218	179	154	31	4,91
11703513	13,5	35	35	80	35	57	133	92	240	198	170	34	6,54
11703817	17	38	38	89	38	60	146	99	262	203	183	19	8,19
11704525	25	45	42	104	45	74	178	126	314	244	226	24	14,22
11705035	35	50	50	119	50	83	197	138	358	270	250	27	20
11705742	43	57	57	134	57	95	222	160	414	302	287	30	28
11706555	55	65	65	145	65	105	260	180	463	330	329	33	40
11707585	85	75	75	163	75	127	329	190	556	376	355	40	62